


# InTouch Thin Client

## D Standard Series

Wonderware's industrially-hardened InTouch® Thin Client hardware provides a unique solution for centralized management of factory floor applications. The Series D InTouch Thin Client: Standard is the perfect ThinManager Ready industrial thin client for control panel applications where wide hardware, software, support and services are needed from one manufacturer. This provides for a complete solution, from small HMI to entire plant supervisory visualization and anywhere in between.



## Series D InTouch Thin Client: Standard Features

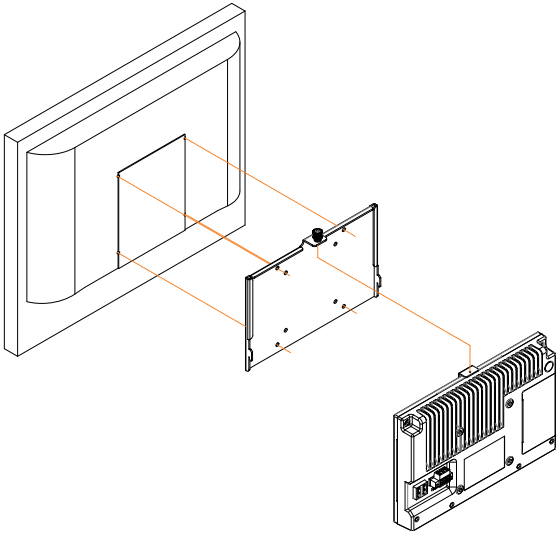

Wonderware® Industrial Computers are the perfect complement to hardware or software standardization efforts, whether a manufacturing operation, infrastructure operation, or a Value-Added Reseller (VAR) or Original Equipment Manufacturer (OEM) machine builder.



### PRODUCT AT A GLANCE

- ACP ThinManager Ready
- Optimized power consumption and wide power ratings
- High performance with Intel® Celeron™ N2930 Quad-Core Celeron CPU AUD 2GB RAM
- Multi-display support for up to two connected monitors on the “headless” unit
- Widescreen and high resolution support up to 1920 x1200
- Rugged design for maintenance-free, continuous operation
- Cable-less, sleek design
- RoHS, UL Compliant
- VESA mounting adapter (optional)
- 24-month warranty (parts and labor)

The ACP ThinManager Ready certification increases the value of Wonderware InTouch Thin Client hardware by extending the manageability of the end-user device. By using ThinManager Ready InTouch Thin Client hardware, you will save time managing your thin clients while gaining superior control over how they can be used. Wonderware InTouch Thin Clients have the ACP Firmware BIOS pre-loaded onto the Thin Client Panels and can download system configuration directly from ThinManager after the ThinManager Server IPs are specified.

In addition to the dual-monitor “headless” device, the InTouch Thin Client has several touch displays options: 7”, 10.1”, 12.1” and 15”. The VESA mounting adapter for the “headless device” enables you to mount the machine to the back of a standard monitor using the VESA pattern.

The Wonderware name is synonymous with quality, reliability, support and services. You can trust that Wonderware Industrial Computer solutions will work hard for you for many years to come.

Schneider Electric offers local Wonderware support on a global scale from more than 200 locations around the globe, 1,500 Certified System Integrators and technical support is available 24 hours a day, 7 days a week, 365 days a year. Both hardware and software are supported by our award-winning Wonderware technical support organization.

# Series D InTouch Thin Client: Standard Specifications

## InTouch Thin Client


### Standard

Client Configuration	
Client	ACP ThinManager Ready
System Hardware	
Processor	Intel® Celeron™ N2930 Quad-Core Celeron 1.83 GHz
Memory	2 GB DDR3
Expandable	N
Graphics Processor	Intel HD graphics; DirectX 11.1, OpenCL /GL, 4K videos Quick Sync encoder
Interface Ports	
Ethernet	2 x 10/100/1000 Mbps (isolated)
USB	2 or 3* x USB 2.0, 1 x USB 3.0 (* 7" has 2 x USB 2.0. 10.1", 12.1" & 15" have 3 x USB 2.0 ports)
Serial	1 x RS-232/422/485, 1/2** x RS-232 (** 7" has 1 x RS-232, 10.1", 12.1" & 15" have 2 x RS-232 ports)
External Video	1 x HDMI, 1 x VGA*** (***) On headless only)
Audio	Line Out
General Features	
Fanless	Y
Rated Input Voltage	12-24 VDC (100-240 VAC external adapter included)
Environmental	
Protection Class	Front: IP65/NEMA 4; Rear: IP20 / Fanless
Operating Temperature	0°C to 50°C (32°F to 122°F)
Operating Humidity	10 to 90% at 40°C (non-condensing)
Storage Temperature	-25°C to +60°C (-13°F to 140°F)
Shock	DIN EN 60068-2-27 / Operating: 15G, 11 ms duration
Vibration	DIN EN 60068-2-64 / Operating: 10-500 Hz: 1G / 3 axis
MTBF	LED-backlight: 100,000 hours in Eco mode
Certifications	
Safety Standards	
Europe	CE, based on 2006/95/EC
U.S.A. / Canada	UL/cUL/CB 61010, UL/cUL/CB 62368
EMC Standards	
Europe	EN 61000-6-4, EN 61000-6-3, CISPR22, RoHS
U.S.A. / Canada	FCC47 CFR PART 15; Class A level; IECS-003 Class B

### Standard

Size	Display Material	Touch Type	Aspect Ratio	Resolution	Brightness (nits/500 cd/m <sup>2</sup> )	Cutout Dimensions (W x H)	Overall Dimensions (W x H x D)	Weight (kg / lb)	Current/ Power
7"	Aluminum	Capacitive (Multi)	16:10	800 x 480	350	192 x 138 mm	202 x 149 x 39 mm	1.2 / 2.6	15 W
10.1"	Aluminum	Capacitive (Multi)	16:10	1280 x 800	350	272 x 176 mm	285 x 189 x 49 mm	2.1 / 4.6	12 W
12.1"	Aluminum	Capacitive (Multi)	4:3	800 x 600	330	303 x 229 mm	319 x 245 x 52 mm	2.5 / 5.5	14 W
15"	Aluminum	Capacitive (Multi)	4:3	1024 x 768	330	392 x 292 mm	401 x 310 x 55 mm	4.4 / 9.7	16 W

# Series D InTouch Thin Client: Standard Specifications

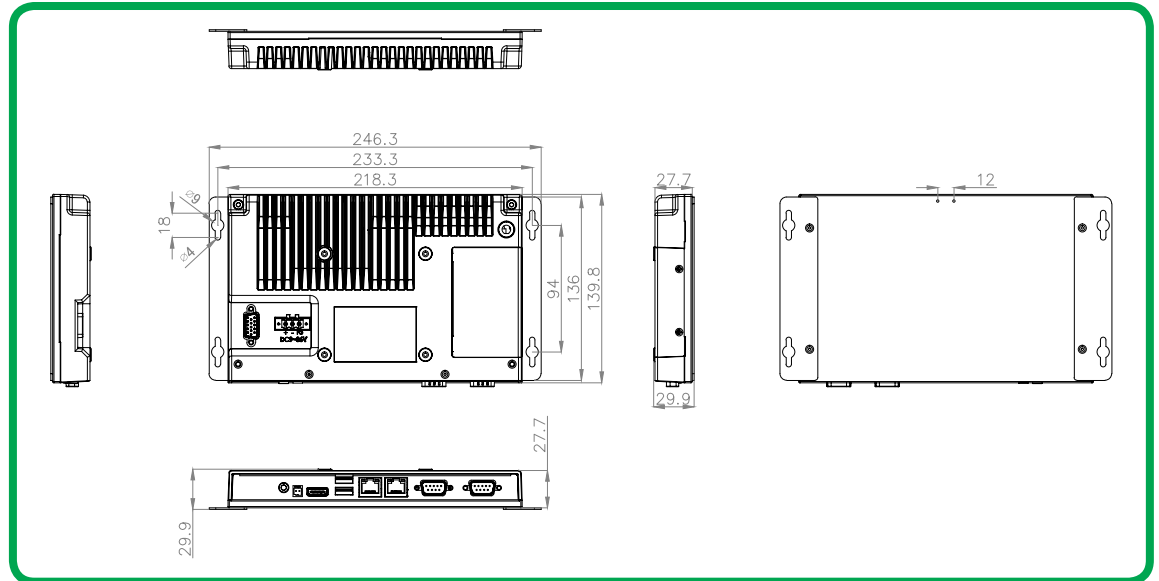

> Dual display mode

## Learn More

For more information on how Wonderware software can help you, visit our site [www.wonderware.com/wic](http://www.wonderware.com/wic) or contact your local Wonderware distributor.

## The Industry's Leading Ecosystem

Our worldwide Partner Ecosystem represents thousands of partners with the goal of helping you succeed. They can help you with InTouch and the full breadth of our Enterprise Control offerings.

**Authorized Distributors:** Our distributors combine their knowledge of our products with a clear understanding of your needs to assist you in the selection and purchase of Wonderware products and related technologies.

**System Integrator Partners:** Our integrator partners can deliver cost-effective solutions using our products across all industries, including yours. Today, our Wonderware system integrator community includes more than 3,500 engineering firms worldwide.

**Industry Solution Partners:** Our solution partners work closely with application software providers, OEMs and VARs to offer industry-specific solutions.

**Partner Products:** These complementary products add value to solutions and expand the value of our solutions to our customers.

## Schneider Electric Software

26561 Rancho Pkwy South, Lake Forest, CA 92630 Telephone: +1 (949)-727-3200 Fax: +1 (949)-727-3270 [software.schneider-electric.com](http://software.schneider-electric.com)

© 2015 Schneider Electric Software, LLC. All rights reserved.

PN WW-4174 Rev. 07/15

# InTouch Panel PC

## Compact Series D

The Wonderware® InTouch® Panel PC provides users the freedom and power to use a PC-based Wonderware InTouch platform with applications that previously used closed, proprietary terminals.


Schneider Electric is the world leader in delivering industrial strength software solutions that simplify the complexity in your operation.

Wonderware Industrial Computers are the perfect complement to hardware or software standardization efforts, whether a manufacturing operation, infrastructure operation, or a Value-Added Reseller (VAR) or Original Equipment Manufacturer (OEM) machine builder. Wonderware Industrial Computers are ruggedized for harsh environments and come pre-installed with the operating system, drivers and Wonderware product software needed for fast and easy implementation.

The versatile InTouch Panel PC: Compact offers more screen sizes, is all solid state and enables standardization on one common powerful visualization interface for machine level applications and supervisory Human Machine Interface (HMI). This allows organizations to break free from proprietary hardware and functionally weak graphic interfaces. Forward thinking standardization helps fully leverage engineering investments, shorten development cycles, bring more value to users and customers, and lower overall costs.



## Series D InTouch Panel PC: Compact Features

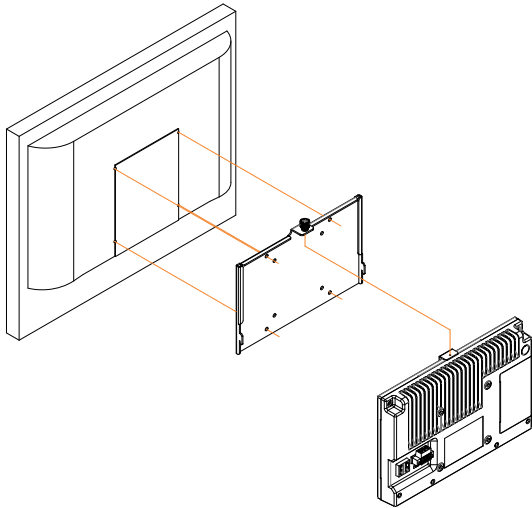

### Break Free from Proprietary Hardware

Break free from functionally weak, proprietary and closed hardware products and experience the power and freedom of an open Windows Embedded Standard -based HMI. Choose InTouch Panel PCs pre-installed with Wonderware InTouch Machine Edition HMI software or Wonderware InTouch. Replace your old, proprietary, stand-alone hardware terminals with powerful, networked, Windows Embedded based InTouch Machine Edition applications that fully integrate from machine level HMI to your supervisory control and plant intelligence applications.

### Ready to Go, Complete Bundled Solution to Save You Money

Factory-tested, certified and fully functional out of the box, the InTouch Panel PCs come with the Wonderware Software pre-installed. Wonderware InTouch is the world's favorite HMI software, used in over one-third of the world's industrial facilities. With Wonderware Industrial Computers, you benefit from pre-installed Wonderware software on a selection of rugged, versatile, feature-laden hardware solutions supporting several different operating systems.

The new Compact line offers the highest level of versatility. They are offered with Windows® Embedded Compact (formerly known as Windows CE) and InTouch Machine Edition all the way up to Windows Embedded Standard 7 and InTouch.

### Built-in Disaster Recovery

With our new dedicated solid state built-in recovery drives, systems can be restored onto off-the-shelf drives within minutes. No more frantic searching for recovery DVDs — Wonderware's disaster recovery is built in.

### Wonderware Installation Wizard

Enables users to select their version of InTouch upon first bootup. It will then automatically install the software without any additional user interaction.

### Compact Series: An Excellent Fit Providing an HMI High-Value Solution with No Moving Parts

InTouch Panel PC: Compact systems are a great fit for your low-end HMI solutions as it provides your operators direct interaction to monitor and control dedicated machines and devices. This enables making intelligent decisions in real time. These fourth-generation Panel PCs are completely fan-less and come with solid state hard drives, standard. That means there are no moving parts in the entire product line, enabling you to improve production performance and increase reliability. The Compact Series offers a 4x performance over the previous mid-level Operator Interface Computers (OIC) series by offering a low-end, high-value solution.

### Advanced-Exchange Program

Advance-Exchange program to help you keep spare inventory costs down. If a device needs to be replaced, we send out the replacement and let you send us back the original within 30 days.

### Ordering Made Simple - Just One Number to Call for Support!

The Wonderware name is synonymous with quality, reliability, support and services. You can trust that Wonderware Industrial Computer solutions will work hard for you for many years to come.

Schneider Electric offers local Wonderware support on a global scale from more than 200 locations around the globe, 1,500 Certified System Integrators and technical support is available 24/7/365. Both hardware and software are supported by our award-winning Wonderware technical support organization.



### PRODUCT AT A GLANCE

- No proprietary hardware
- Complete bundled solution. Wonderware InTouch or InTouch Machine Edition comes pre-installed and licensed, enabling you eliminate Software/Hardware incompatibility concerns.
- Built-in Disaster Recovery
- Low-end, high-value solution
- No moving parts throughout entire product range: Solid State Drives and fan-less cooling increases efficiency and improves performance.
- Wide variety of mounting options. Box-only version can mount directly to a VESA-patterned monitor.
- Advanced-Exchange Program
- Ordering made simple
- One source of support

# Compact Series D InTouch Panel PC Specifications

## InTouch Panel PC

### Compact

Software Configuration			
OS	Windows Embedded Compact 7	Windows Embedded Standard 7 32-bit	
Bundled Software	InTouch Machine Edition		InTouch Runtime
System Hardware			
Processor	Intel® Celeron™ N2930 Quad-Core Celeron 1.83 GHz		
Memory	2 GB DDR3		
Expandable	No	No	No
Graphics Processor	Intel HD graphics; DirectX 11.1, OpenCL /GL, 4K videos Quick Sync encoder		
Drives			
Mass Storage	16 GB SATA SSD	32 GB SATA SSD	
Drive Mounting	On board removable		
Disaster-Recovery	N	Dedicated Media	
Interface Ports			
Ethernet	2 x 10/100/1000 Mbps (isolated)		
USB	2 or 3* x USB 2.0, 1 x USB 3.0 (* 7" has 2x USB 2.0 ports, 10.1", 12.1" and 15" have 3x USB 2.0 ports.)		
Serial	1 x RS-232/422/485, 1/2** x RS-232 (** 7" has 1x RS-232 port, 10.1", 12.1" and 15" have 2x RS-232 ports.)		
External Video	1 x HDMI, 1 x VGA*** (***) On headless only.)		
Audio	Line Out		
General Features			
Modular Components	No	No	No
Fanless	Yes	Yes	Yes
Expansion Slots	No	No	No
Rated Input Voltage	12-24 VDC (100-240 VAC external adapter included)		
Environmental			
Protection Class	Front: IP65/NEMA 4; Rear: IP20 / Fanless		
Operating Temperature	0°C to 50°C (32°F to 122°F)		
Operating Humidity	0°C to 50°C (32°F to 122°F)		
Storage Temperature	-25°C to +60°C (-13°F to 140°F)		
Shock	DIN EN 60068-2-27 / Operating: 15G, 11 ms duration		
Vibration	DIN EN 60068-2-64 / Operating: 10-500 Hz: 1G / 3 axis		
MTBF	LED-backlight: 100,000 hours in Eco mode		
Certifications			
Safety Standards			
Europe	CE, based on 2006/95/EC		
U.S.A. / Canada	UL/cUL/CB 61010, UL/cUL/CB 62368		
EMC Standards			
Europe	EN 61000-6-4, EN 61000-6-3, CISPR22, RoHS		
U.S.A. / Canada	FCC47 CFR PART 15; Class A level; IECS-003 Class B		

### Compact

Size	Display Material	Touch Type	Aspect Ratio	Resolution	Brightness (nits/500 cd/m <sup>2</sup> )	Cutout Dimensions (W x H)	Overall Dimensions (W x H x D)	Weight (kg / lb)	Current/ Power
7"	Aluminum	Capacitive (Multi)	16:10	800 x 480	300	192 x 138 mm	202 x 149 x 39 mm	1.2 / 2.6	15 W
10.1"	Aluminum	Capacitive (Multi)	16:10	1280 x 800	330	272 x 176 mm	265 x 189 x 49 mm	2.1 / 4.6	12 W
12.1"	Aluminum	Capacitive (Multi)	4:3	800 x 600	350	303 x 229 mm	319 x 245 x 52 mm	2.5 / 5.5	14 W
15"	Aluminum	Capacitive (Multi)	4:3	1024 x 768	350	392 x 292 mm	401 x 310 x 55 mm	4.4 / 9.7	16 W



# Compact Series D InTouch Panel PC Specifications, etc.

## Further Information

For more information on how Wonderware software can help you, visit our site: [wonderware.com/wic](http://wonderware.com/wic).

You can also visit our blogs at:

- [blog.wonderware.com](http://blog.wonderware.com)
- [oem.wonderware.com](http://oem.wonderware.com)
- [wonderware.com/wwtimes](http://wonderware.com/wwtimes) (weekly HMI/SCADA related news aggregator)

Or contact your local Wonderware distributor.

## The Industry's Leading Ecosystem

Our worldwide Partner Ecosystem represents thousands of partners all with the goal of helping you succeed. They can help you with InTouch as well as the full breadth of our Enterprise Control offerings.

**Authorized Distributors** – Our distributors combine their knowledge of our products with a clear understanding of your needs to assist you in the selection and purchase of the Wonderware products and related technologies.

**System Integrator Partners** – Our integrator partners can deliver cost effective solutions using our products across all industries, including yours. Today our Wonderware system integrator community includes more than 3,500 engineering firms worldwide.

**Industry Solution Partners** – Our solution partners work closely with application software providers, OEMs and VARs to offer industry-specific solutions.

**Partner Products** – These complementary products add value to solutions and expand the value of our solutions to our customers.

## Schneider Electric Software

26561 Rancho Pkwy South, Lake Forest, CA 92630 Telephone: +1 (949)-727-3200 Fax: +1 (949)-727-3270 [software.schneider-electric.com](http://software.schneider-electric.com)

© 2015 Schneider Electric Software, LLC. All rights reserved.

PN WW-4241 Rel. 06/15




# InTouch Panel PC

Standard / Premium  
Series D

The Wonderware® InTouch® Panel PC provides users the freedom and power to use a PC-based Wonderware InTouch platform with applications that previously used closed, proprietary terminals.



## Series D InTouch Panel PC Features

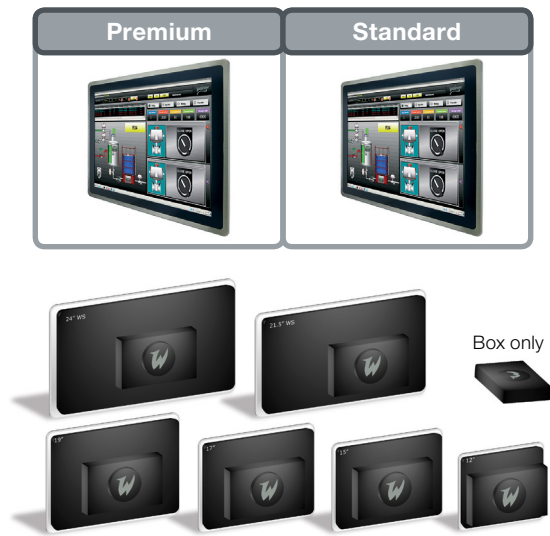

Schneider Electric is the world leader in delivering industrial strength software solutions that simplify the complexity in your operation.

Whether a manufacturing operation, infrastructure operation, a Value-Added Reseller (VAR) or Original Equipment Manufacturer (OEM) machine builder, Wonderware Industrial Computers InTouch Panel PCs are the perfect complement to hardware or software standardization efforts. Wonderware Industrial Computers are ruggedized for harsh environments and come pre-installed with the operating system, drivers and Wonderware product software needed for fast and easy implementation.

Wonderware Industrial Computers allow organizations to break free from proprietary hardware and functionally weak graphic interfaces. The Series D, InTouch Panel PCs are solid-state and offer more screen sizes, screens and boxes which are interchangeable across both product lines. This enables standardization on one common and powerful visualization interface for machine level applications and supervisory Human Machine Interface (HMI). Forward thinking standardization helps fully leverage engineering investments, shorten development cycles, bring more value to users and lower overall costs.



### PRODUCT AT A GLANCE

- Break free from proprietary hardware
- Modular design with tool-less component removal increases efficiency and reduces downtime
- Dedicated disaster recovery drive with bundled Acronis True Image
- No moving parts throughout entire product range; Solid state drives and fanless cooling standard
- Advanced Exchange Program
- Complete bundled solution
- Selectable version of Wonderware InTouch automatically installed and licensed
- Ordering made simple
- One source of support
- Eliminate software / hardware incompatibility concerns
- On-board disaster recovery

### Ready to Go and Scalable to Save You Money

Factory-tested, certified and ready to work right out of the box, Wonderware InTouch is the world's favorite HMI software and is used in over one-third of the world's industrial facilities. With Wonderware Industrial Computers, you benefit from pre-installed Wonderware software on a selection of rugged, versatile, feature-laden hardware solutions. Use powerful Wonderware software across all your plant devices for superior scalability and flexibility to help you lower your total cost of ownership.

### Break Free from Proprietary Hardware

Break free from functionally weak, proprietary and closed hardware products and experience the power and freedom of an open and fully functional PC-based or Windows Embedded Standard -based HMI. Choose Wonderware InTouch Panel PCs, pre-installed with Wonderware HMI software. Replace your old, proprietary, stand-alone hardware terminals with powerful, networked, Windows Embedded-based InTouch applications that fully integrate across your supervisory control and plant intelligence applications.

### Ordering Made Simple – Just One Number to Call for Support!

The Wonderware name is synonymous with quality, reliability, support and services. You can trust that Wonderware Industrial Computer solutions will work hard for you for many years to come. Schneider Electric offers local Wonderware support on a global scale from more than 200 locations around the globe and with 24/7/365 technical support. Both hardware and software are supported by our award-winning Wonderware technical support organization.

## Series D InTouch Panel PC Features (continued)

### Modular Design Enables Lower Lead Time

A fully-modular construction makes modifying and servicing our new family of InTouch Panel PCs a real breeze. They come as one complete and integrated hardware and software solution and feature Wonderware InTouch, the industry standard in SCADA, networking and ERP. This enables you to service and upgrade them easier, reduce inventory, and decrease lead time.

### Standard and Premium Series – Simplifies Integration of Disparate Systems

Wonderware combines a fully functioning computer with award-winning Wonderware HMI software. We give users the freedom to easily and economically replace proprietary panels that offer few features and functions with powerful and rugged touch panel computers and Wonderware InTouch software. Wonderware InTouch Panel PCs empower industrial personnel to significantly reduce the problems associated with integrating disparate machine-control and supervisory systems. This is because both systems can now run the same InTouch HMI software. Eliminate the need for training on different types of HMI software and lower software administration and management costs by replacing existing equipment with Wonderware InTouch Panel PCs.

### Field Replaceable Modules for Easy Maintenance and Lower Service Costs

Downtime, whether scheduled or unscheduled, can be costly to an operation's productivity and efficiency. Returning an automation system back into service quickly is important to maintaining KPIs and production quotas.

InTouch Panel PCs Series D HMI systems are easily replaced by customers in the field, enabling high productivity with the least amount of downtime and disruption. And, just as important, is the reduction of spare parts inventory in the supply chain - which equates to less capital invested, easier maintenance and higher availability and uptime.

Reduce costs by expanding the use of Wonderware HMI software throughout your organization. Engineers and operators already familiar with the InTouch HMI can leverage that experience, engineering investment, and training across the entire range of Wonderware InTouch Panel PCs. First-time users will love the power and ease of use of Wonderware software that comes pre-installed! Wonderware Industrial Computers offer increased efficiency and cost savings in:

- Application Development Hardware
- Implementation
- Software Administration
- Software Integration
- Operator Training
- Maintenance

Retain and fully utilize your engineering investment while gaining standardization throughout your organization. Wonderware Industrial Computers can provide seamless access to all your existing Wonderware software applications without engineering modifications. In addition, Wonderware Industrial Computers can expand your InTouch applications to areas never before imagined. Enable your IT department to reduce the time they spend on software administration and management by using Wonderware software as a standard across all of your HMI systems.

### Wonderware Installation Wizard

Enables users to select their version of InTouch upon first bootup. It will then automatically install the software without any additional user interaction.



**“Wonderware software enabled Yamatake to increase sales by 50% over the last four years.”**

*—Hironobu Hirakawa,  
Development Manager, Yamatake*



**“We have to make the right decisions every day because it has a huge impact on our bottom line. Wonderware helps make those decisions.”**

*—Scott Jamison, VP Engineering, Pepsi Bottling Ventures*

# Series D InTouch Panel PC Specifications

InTouch Panel PC		
	Standard	Premium
<b>Software Configuration</b>		
OS	Windows Embedded Standard 7 32-bit	Windows Embedded Standard 7 64-bit
Bundled Software	InTouch Runtime	
<b>System Hardware</b>		
Processor	Intel® Atom™ E3845 1.91 GHz	Intel® Core™ i7-4650U 3.30 GHz
Memory	4 GB DDR3	8 GB DDR3
Expandable	Y - up to 8GB	Y - up to 16GB
Graphics Processor	Intel HD graphics; DirectX 11.1, OpenCL /GL, 4K videos Quick Sync encoder	
<b>Drives</b>		
Mass Storage	180 GB SATA SSD	
Drive Mounting	Tool-less Single cage	Tool-less Dual cage
SD Expansion	N	N
Disaster-Recovery	Dedicated Media	
<b>Interface Ports</b>		
Ethernet	2 x 10/100/1000 Mbps (isolated)	
USB	4 x USB 2.0	4 x USB 3.0
Serial	1 x RS-232/422/485 (isolated)	1 x RS-232/422/485, 1 x RS-232 (isolated)
External Video	1 x HDMI, 1 x VGA	
Audio	Line-in, Line-out	
<b>General Features</b>		
Modular Components	Y	Y
Fanless	Y	Y
Expansion Slots	N	Y - 1 x half-sized PCIe
Rated Input Voltage	12-24 VDC (100-240 VAC external adapter included) (Isolated)	
<b>Environmental</b>		
Protection Class	Front: IP66/NEMA 4/4X; Rear: IP20 / Fanless	
Operating Temperature	0°C to 50°C (32°F to 122°F)	
Operating Humidity	5 to 95% non-condensing	
Storage Temperature	-25°C to +60°C (-13°F to 140°F)	
Shock	DIN EN 60068-2-27 / Operating: 15G, 11 ms duration	
Vibration	DIN EN 60068-2-64 / Operating: 10-500 Hz: 1G / 3 axis	
MTBF	LED-backlight up to 100,000 hours in Eco mode	
<b>Certifications</b>		
<b>Safety Standards</b>		
Europe	CE, based on 2006/95/EC	
U.S.A. / Canada	UL/cUL/CB 61010, UL/cUL/CB 62368	
<b>EMC Standards</b>		
Europe	EN 61000-6-4, EN 61000-6-3, CISPR22, RoHS	
U.S.A. / Canada	FCC47 CFR PART 15; Class B level; IECS-003 Class B	

## Series D InTouch Panel PC Specifications, etc.

### Premium

Size	Display Material	Touch Type	Aspect Ratio	Resolution	Brightness (nits/500 cd/m <sup>2</sup> )	Cutout Dimensions (W x H)	Overall Dimensions (W x H x D)	Weight (kg / lb)
15"	Stainless Steel	Resistive (Single)	4:3	1024 x 768	500	387 x 291 mm	397 x 311.5 x 94.6 mm	9.3 / 20.6
15.6"	Stainless Steel	Capacitive (Multi)	16:9	1366 x 768	400	412.4 x 261.7 mm	446 x 276.5 x 94.6 mm	9.7 / 21.4
17"	Stainless Steel	Resistive (Single)	4:3	1280 x 1024	350	408 x 313 mm	418 x 353.7 x 94.6 mm	10.3 / 22.7
18.5"	Stainless Steel	Capacitive (Multi)	16:9	1366 x 768	250	479.3 x 300.3 mm	495 x 316 x 94.6 mm	10.9 / 24.1
19"	Stainless Steel	Resistive (Single)	4:3	1280 x 1024	350	420 x 358 mm	451.5 x 377.7 x 94.6 mm	11.2 / 24.7
21.5"	Stainless Steel	Capacitive (Multi)	16:9	1920 x 1080	250	534 x 331 mm	552.6 x 343.8 x 94.6 mm	12.2 / 26.8
24"	Aluminum	Resistive (Single)	16:9	1920 x 1080	250	534 x 331 mm	589.6 x 354.6 x 94.6 mm	13.1 / 28.8

### Standard

Size	Display Material	Touch Type	Aspect Ratio	Resolution	Brightness (nits/500 cd/m <sup>2</sup> )	Cutout Dimensions (W x H)	Overall Dimensions (W x H x D)	Weight (kg / lb)
12"	Stainless Steel	Resistive (Single)	4:3	1024 x 768	500	297 x 236 mm	313.5 x 246 x 79.6 mm	7.8 / 17.1
15"	Stainless Steel	Resistive (Single)	4:3	1024 x 768	400	387 x 291 mm	397 x 311.5 x 79.6 mm	8.9 / 19.6
15.6"	Stainless Steel	Capacitive (Multi)	16:9	1366 x 768	400	412.4 x 261.7 mm	446 x 276.5 x 79.6 mm	9.3 / 20.4
17"	Stainless Steel	Resistive (Single)	4:3	1280 x 1024	350	408 x 313 mm	418 x 353.7 x 79.6 mm	9.8 / 21.7
18.5"	Stainless Steel	Capacitive (Multi)	16:9	1366 x 768	250	479.3 x 300.3 mm	495 x 316 x 79.6 mm	10.5 / 23.1
19"	Stainless Steel	Resistive (Single)	4:3	1280 x 1024	350	420 x 358 mm	451.5 x 377.7 x 79.6 mm	10.8 x 23.7
21.5"	Stainless Steel	Capacitive (Multi)	16:9	1920 x 1080	250	534 x 331 mm	552.6 x 343.8 x 79.6 mm	11.7 / 25.8
24"	Aluminum	Resistive (Single)	16:9	1920 x 1080	250	589.6 x 354.6 mm	601.6 x 366.6 x 79.6 mm	12.6 / 27.8

### Further Information

For more information on how Wonderware software can help you, visit our site: [wonderware.com/wic](http://wonderware.com/wic).

You can also visit our blogs at:

- [blog.wonderware.com](http://blog.wonderware.com)
- [wonderware.com/wwtimes](http://wonderware.com/wwtimes) (weekly HMI/SCADA related news aggregator)

Or contact your local Wonderware distributor.

### The Industry's Leading Ecosystem

Our worldwide Partner Ecosystem represents thousands of partners all with the goal of helping you succeed. They can help you with InTouch as well as the full breadth of our Enterprise Control offerings.

**Authorized Distributors** – Our distributors combine their knowledge of our products with a clear understanding of your needs to assist you in the selection and purchase of the Wonderware products and related technologies.

**System Integrator Partners** – Our integrator partners can deliver cost effective solutions using our products across all industries, including yours.

**Industry Solution Partners** – We work closely with application software providers, OEMs and VARs to offer industry-specific solutions.

**Partner Products** – These complementary products add value to solutions and expand the value to our customers.

### Schneider Electric Software

26561 Rancho Pkwy South, Lake Forest, CA 92630 Telephone: +1 (949)-727-3200 Fax: +1 (949)-727-3270 [software.schneider-electric.com](http://software.schneider-electric.com)

© 2015 Schneider Electric Software, LLC. All rights reserved.